


Special thanks to the City of Lynchburg, Virginia, and Blair Communications for help with this brochure.

This brochure was prepared under Cooperative Agreement Assistance #CX824505 between the Water Environment Federation (WEF) and the U.S. Environmental Protection Agency. For more information about sewer backups, overflows, and downspout disconnection, contact your local sewer system authority, or

Water Environment Federation

601 Wythe Street
Alexandria, VA 22314-1994
Phone: 703/684-2400
Fax: 703/684-2492
Web site: <http://www.wef.org>

For additional copies of this brochure, contact WEF at 1-800-666-0206 or <http://www.wef.org>.

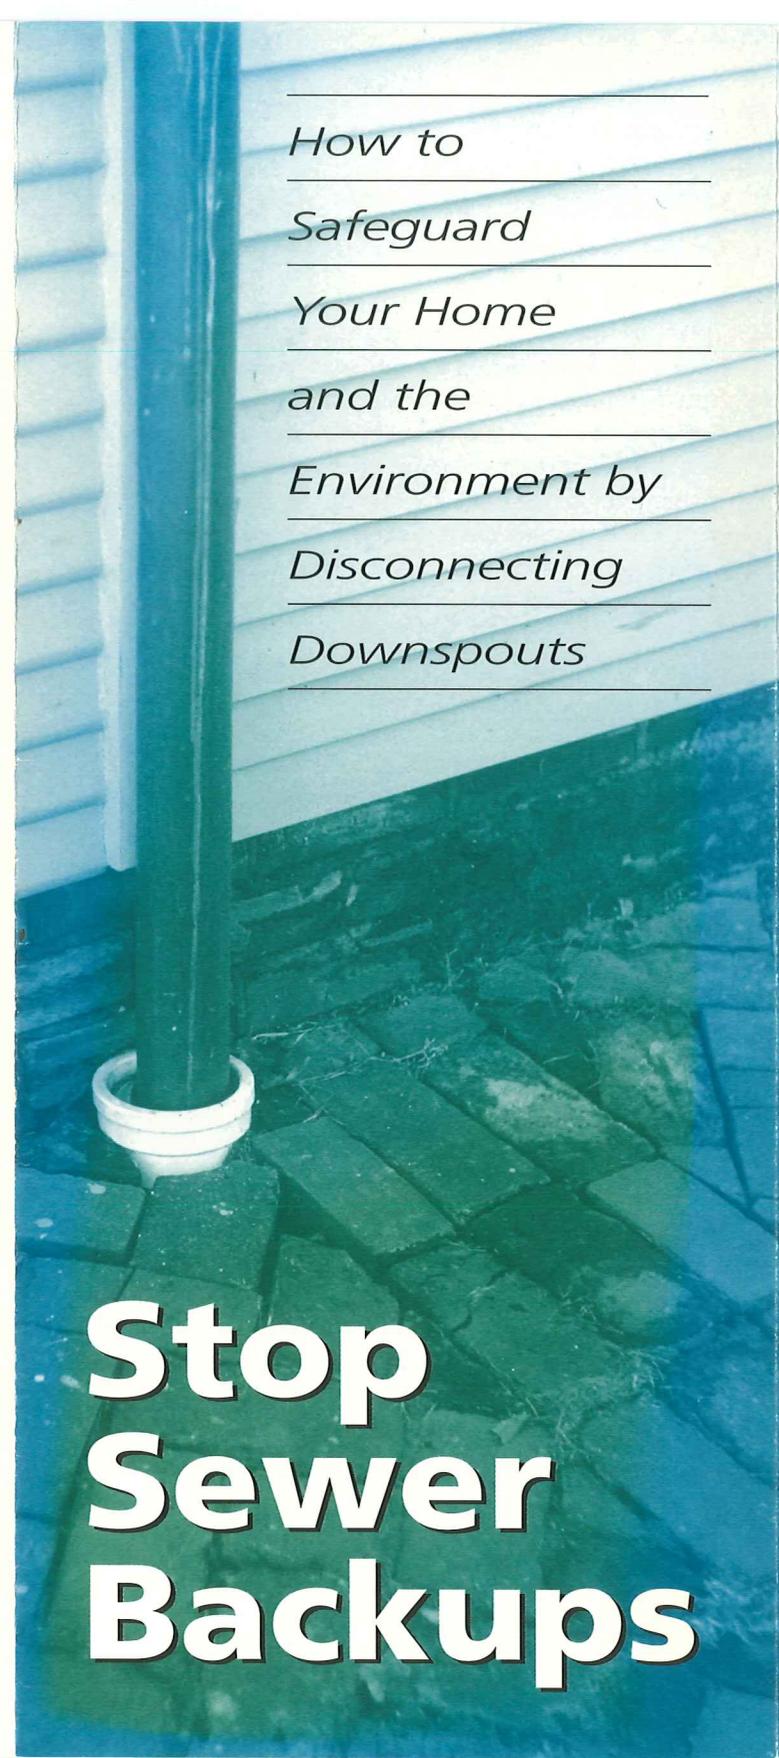

How to Safeguard Your Home and the Environment by Disconnecting Downspouts

Stop Sewer Backups

Connected downspouts — what are they?



Many older homes, especially in cities, have gutters connected directly to the sanitary sewer. This means that rain from the roof runs directly into the sewer. Not all downspouts that look like this picture are connected to the sanitary sewer; some may empty into a storm drain.

Call your local sewer system authority or public works department to find

out if your connected downspout empties into the sanitary sewer.

Why is this a problem?

The problem is too much water. Sanitary sewer systems can only handle a certain amount of water. During a rainstorm, water gets into the sewer from connected downspouts and other sources. When there is too much water for the system, the excess has to go somewhere, and that somewhere is often somebody's basement, a manhole, or a nearby creek or river. Municipalities have a legal requirement to stop water from overflowing out of sewers. Even if the water does not overflow, it's still a problem, because the wastewater treatment plant has to treat the extra water.



Why should you care?

Sewage backups and overflows are messy, costly, and a threat to health and the environment.

Cleaning house. When there is a sewer backup into a house, the homeowner may have to pay the cost



this damage (unless the policy or "rider").

Health. Raw sewage contains germs that can cause diseases such as hepatitis and gastroenteritis.

Long term environmental damage.

Raw sewage in streams and lakes can cause illnesses in fish, kill aquatic life, and make the water unusable for swimming, fishing, and as a drinking water source.

Higher costs mean higher utility bills.

When a city ends up treating the extra water, it has to increase the size of the treatment plant, which also have to pay fines when rain overflows into the environment. Increased utility costs are passed along to consumers as rate increases.

What can you do?

You should check to see whether your home's downspouts can help solve the problem. Disconnection is usually a simple process. The steps are shown on the next page of this brochure. Your local sewer system authority or public works department should be able to tell you if downspouts are connected to the sewer. If so, whether disconnection is necessary.

You can also let other people know that downspouts need to be disconnected. Sewer overflows cost the entire community.

How to Disconnect Your Downspout

Check Before You Start

The steps outlined below are general guidelines for disconnecting downspouts and do not apply in all situations. Contact your local sewer system authority or public works department to see what specific guidance is available and to obtain information on local conditions, materials, and regulations. You may want, or be required, to hire a professional contractor or plumber to do the work. In some areas, an inspection of the disconnection is also required. Be aware, too, that some municipalities discourage or prohibit downspout disconnection due to local zoning or concerns about runoff.

Use of the information provided in this brochure is voluntary. The organizations that prepared this brochure assume no responsibility for consequences arising from its use and specifically disclaim all liability for damages of any kind arising out of or resulting from the use of the information in this brochure.

1. Tools and materials you are likely to need:

- | | |
|-----------------|-----------------------------------|
| safety glasses | bucket (for concrete) |
| work gloves | spare gutter pipe |
| hammer | splash block |
| chisel | gutter "elbow" or |
| hacksaw | other discharge devices |
| measuring tape | flexible/corrugated pipe |
| screw driver | concrete mix (or other permanent, |
| trowel or other | weatherproof sealant) |
| digging tools | plastic boot cap |

2. Safety

Make sure that you have the safety equipment that you need, including work gloves and safety glasses. Many disconnections involve hammering and sawing which can be hazardous to your eyes. Aluminum gutters can be extremely sharp after being cut, so protect your hands with work gloves.

3. Call before digging

If you bury part of your discharge pipe, remember that even digging a shallow trench can sever a utility line. To be safe, call your local utilities (most jurisdictions have a "call before you dig" hot line) to make sure you avoid digging near service lines.

Disconnection Steps

STEP 1 — Remove downspout from boot

Unless your gutter downspout can be easily lifted out of the boot, you'll need to cut it just a few inches above the boot—making sure that you've left enough room for the downspout "elbow" or other end-of-pipe device.




© Blair Communications



© Blair Communications

STEP 2 — Remove the boot (Optional)

You can leave the boot in place, or remove the boot for a more finished look. To remove the boot, cut it with a hacksaw, or hammer and chisel. Be sure to wear safety glasses, and remove sharp edges that remain on the pipe after cutting.

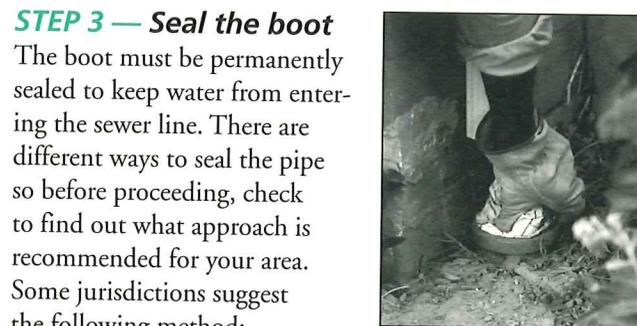

© Blair Communications

STEP 3 — Seal the boot

The boot must be permanently sealed to keep water from entering the sewer line. There are different ways to seal the pipe so before proceeding, check to find out what approach is recommended for your area. Some jurisdictions suggest the following method:

The pipe can be sealed with concrete or other material that makes a permanent, weatherproof seal. Before starting, check the pipe to make sure that you will not block any other junction (such as your

washing machine draining into the same pipe). Then push balled-up newspaper tightly three or four inches down into the boot. Make sure that the fit is snug, otherwise the concrete could actually block the sewer. Carefully pour the concrete or other material that gives a permanent weatherproof seal into the pipe, and smooth the top surface.

Other areas do not recommend using newspaper and suggest the use of friction or sewer plugs, which are often available from licensed contractors.

STEP 4 — Redirect rainwater with end-of-pipe device(s)

The last step is to redirect the rainwater away from the house. The exact approach depends on individual conditions. It is important that the rainwater discharges a safe distance from your foundation (three or four feet is usually enough), that the runoff is not a nuisance to your neighbors, or causes other problems, like discharging across a sidewalk so that ice forms in the winter.



© Blair Communications

Sometimes all that is needed is an "elbow" pipe to the bottom of the gutter downspout and a plastic or concrete splashblock. Other situations (such as sloping ground) may require a different solution. There are a number of devices available designed to channel the rainwater away from your home (ask a hardware store to recommend the best one for your needs).

Check with your local sewer system authority or public works department for other redirection options in your area.

Disconnection is usually a simple, relatively inexpensive process.

Special Situations

Steep Slopes

If the gutter is next to a steep slope, be careful that the discharge from the new downspout will not wash away soil on the hillside. There are two ways to avoid this:

attach a pipe long enough to drain to a safe area, or install an attachment that directs water away from the gutter. Always be careful that the water comes out of the gutter. Always be careful that the water does not drain onto a neighbor's property. Always be careful that the runoff from your downspouts does not cause flooding of your neighbor's yard. Do not discharge stormwater too close to your property.



© Blair Communications



© Blair Communications

Extend

Some old downspouts that extend to the ground. You can remove them in place and install a new pipe device in place at the top of the gutter. You can remove them and install a new pipe device.

Inadequate Drainage

Some gutters may be located on a steep slope, which is not a safe place for the water to drain. One solution is to install a downspout that will safely carry the water away from the house with the downspout's "elbow." Another solution is to install a splash block that will disperse the water enough to prevent it from forming a puddle. Make sure that it is draining away from your foundation.